

# HTP95-12

Glass Touch Panel with RGB LEDs and up to 12 Buttons

**HTP95-12** is a full color glass touch panel with easy to use buttons and RGB backlights.

Supports KNX, RS485 Modbus, Z-wave communication and compatible with UK/EU standard back boxes.




## Product Specification

Product Name	<b>HTP95-12</b>
Dimensions (H x W x D)	95 x 95 x 9 mm
Weight	85 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for <b>HTP95-12-KNX</b> 24V for <b>HTP95-12</b>
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for <b>HTP95-12-KNX</b> 80 mA for <b>HTP95-12</b>
Power Supply Options	via bus cable
Physical Interfaces	KNX for <b>HTP95-12-KNX</b> RS485 for <b>HTP95-12</b>
Communication Protocols	KNX for <b>HTP95-12-KNX</b> Modbus for <b>HTP95-12</b>

Temperature Sensor	NTC, 0.5 °C Accuracy
Max Quantity of buttons	12
Status Indicators / Backlight	Individually programmable backlight color and brightness
Mounting	Snap-in magnetic mounting
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20

## Dimensions

Top & Side views (mm)

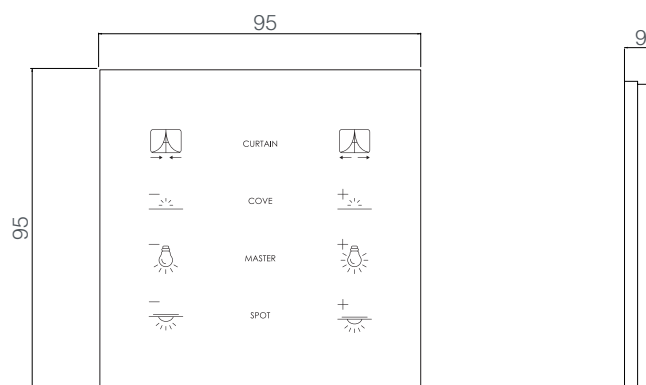


# HTP95-12

Glass Touch Panel with RGB LEDs and up to 12 Buttons



## Back Box Options

EU 2M Standard

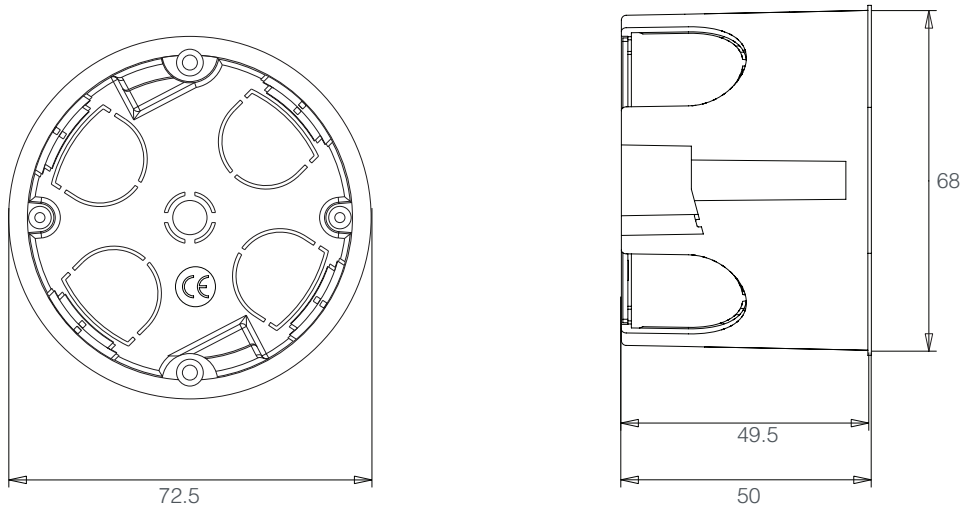

UK 3x3 Standard

