

# HTP95-12-TT-Table Top

Bedside touch panel with glass surface, 12 buttons & thermostat and table top design

**HTP95-12-TT-Table Top** is a full color glass touch thermostat panel with easy to use buttons and RGB backlights.

Supports KNX, RS485 Modbus, Z-wave communication and compatible with UK/EU standard back boxes.




## Product Specification

Product Name	<b>HTP95-12-TT-Table Top</b>
Dimensions (H x W x D)	137 x 210 x 108 mm
Weight	1400 g
Frame Options	Glass surface with customizable background color
Supply Voltage	30V for <b>HTP95-12-TT-Table Top-KNX</b> 24V for <b>HTP95-12-TT-Table Top</b>
Supply Frequency	DC voltage
Current Consumption	10 mA (eco mode), 25mA (bright mode) for <b>HTP95-12-TT-Table Top-KNX</b> 80 mA for <b>HTP95-12-TT-Table Top</b>
Power Supply Options	via coiled cable
Physical Interfaces	KNX for <b>HTP95-12-TT-Table Top-KNX</b> RS485 for <b>HTP95-12-TT-Table Top</b>
Communication Protocols	KNX for <b>HTP95-12-TT-Table Top-KNX</b> Modbus for <b>HTP95-12-TT-Table Top</b>

Screen Type	7 segment, 4 digits display
Temperature Sensor	NTC, 0.5 °C Accuracy
Max Quantity of buttons	10 + 12
Status Indicators / Backlight	Individually programmable backlight color and brightness
Warm Up Time	20 seconds
Operating Temperature Range	0 °C...+45 °C
Storage & Transportation Temperature	-10 °C...+70 °C
Maximum Air Humidity	90%
Protection Level	IP20

## RJ45 Connection Pins

1	No Connection	-
2	No Connection	-
3	No Connection	-
4	No Connection	-
5	Black	RS-485 B
6	Red	RS-485 A
7	Yellow	GND
8	Green	+24 V

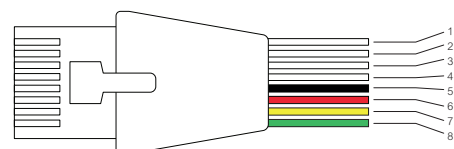

# HTP95-12-TT-Table Top

Bedside touch panel with glass surface, 12 buttons & thermostat and table top design



## Dimensions

Top & Side view (mm)

